HD SERIES

PRODUCT FEATURES:
Holdowns (HD) are used to resist uplift forces due to wind or overturning of shear walls. These are available in various sizes to meet the light to heavy load requirements using nails, screws and bolts as fasteners.

Other HD applications include purlin-to-purlin, Concrete/ Masonry walls to decking or flooring attachments.

MATERIAL:
See Allowable Loads Table.

COATING:
Galvanized (G185) - LTT20, HDTT, HDTT3, HDTT6, HD5, HD7, HD8 & HD11
Spray Painted Primer (gray) - HD14 & HD22

INSTALLATION:
- Use all specified fasteners in schedule to achieve values indicated

CODE COMPLIANCE:
TER 0910-01; FL 3557

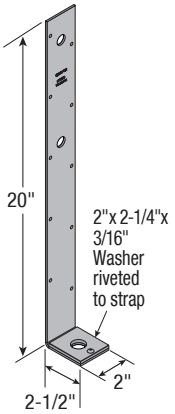

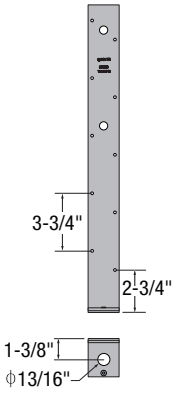

LTT20



LTT20 as Tension Tie

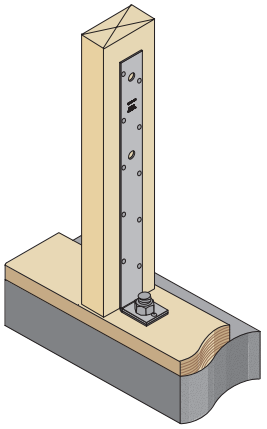

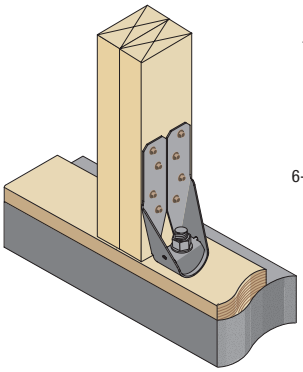





HDTT & HDTT3
(Part includes bend washer and structural wood screws)





HDTT as Deck Tension Tie

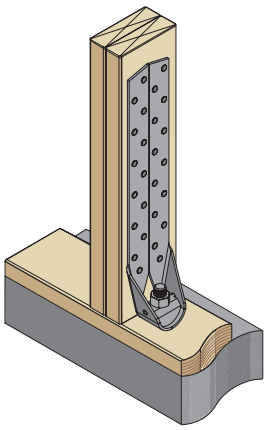

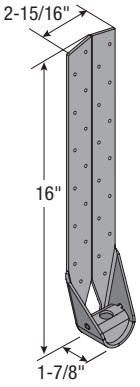

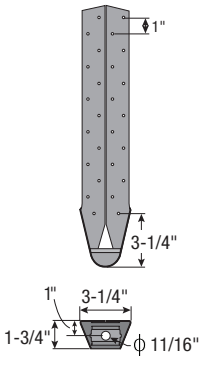

HDTT6

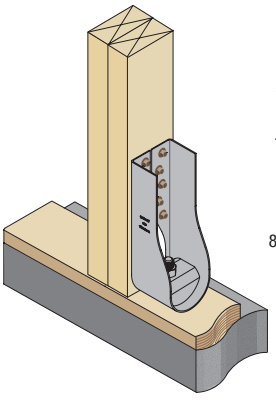

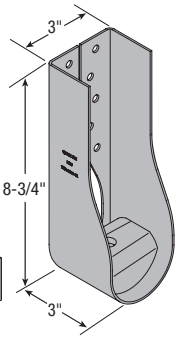

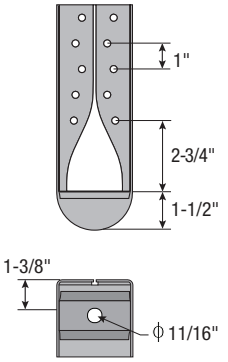

HD5
(Part includes bend washer and structural wood screws)